


RELIEF SAFETY VALVES

[BOILER MOUNTING]



SPECIFICATIONS	
MATERIAL	BRONZE
END CONNECTIONS	SCREWED
MAX BLOW OFF PRESSURE	250 PSI (17.3 BAR GAUGE)
MIN BLOW OFF PRESSURE	5 PSI (0.34 BAR GAUGE)
SIZE RANGE	1/2, 1 INCH

G.M. CONFIRMING TO IS 318 Gr. 2 &
BRASS CONFIRMING TO IS 319

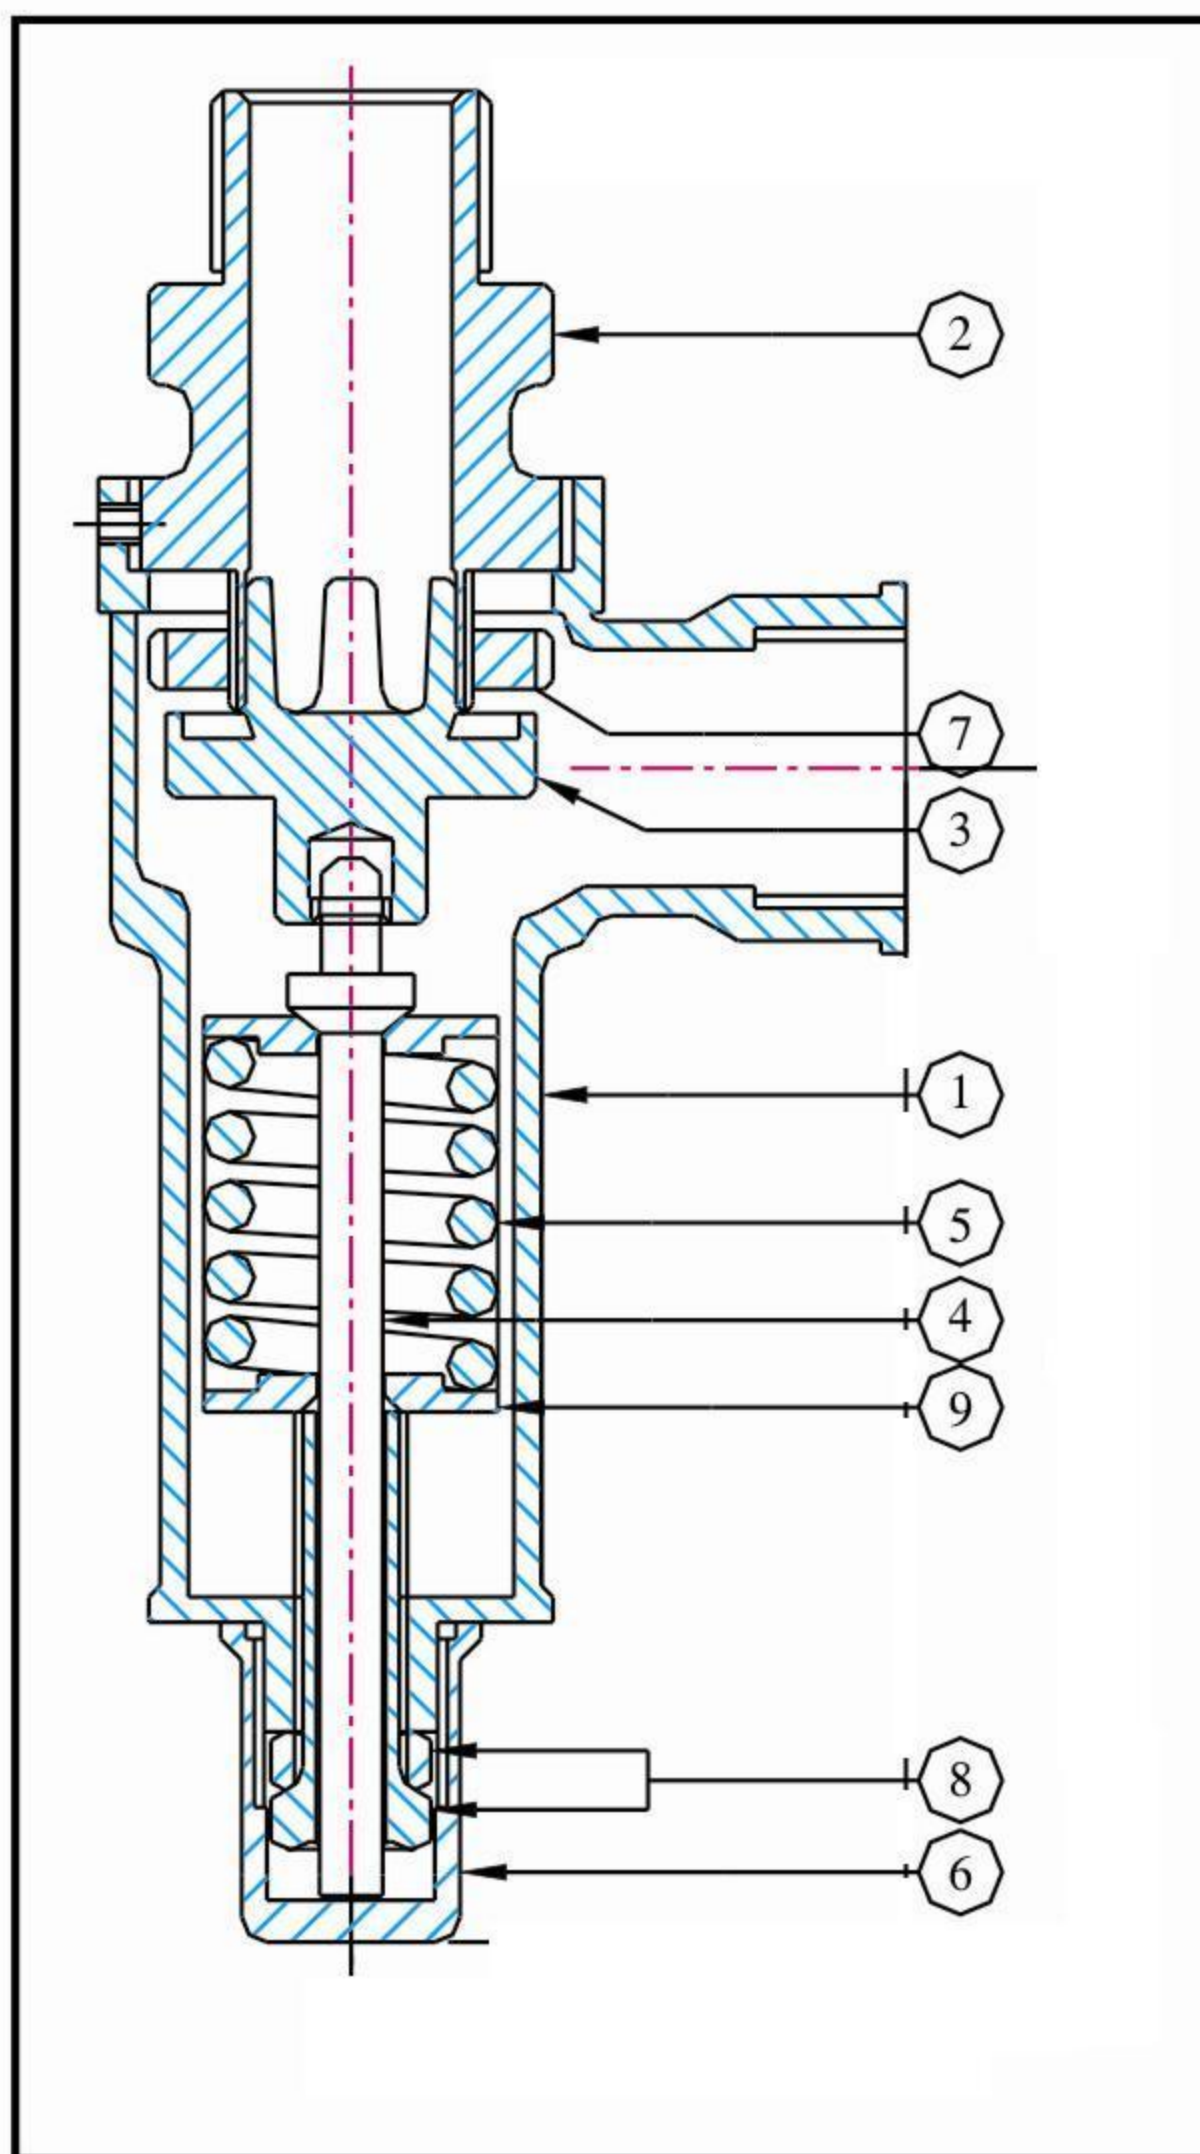

RELIEF SAFETY VALVE (1 INCH)

SR. NO.	PART NAME	MAT.	QTY.
01	BODY	G.M.	01
02	UNION	G.M.	01
03	DIAPHRAGM	G.M.	01
04	STEAM	G.M.	01
05	SPRING	G.M.	01
06	CAP	G.M.	01
07	RING	G.M.	01
08	P. A. NUT & BOLT	G.M.	01
09	WASHER	G.M.	01

INSTALLATION ADVICE :

Outlet from the safety valve should be arranged to discharge at a safe place where it is visible it should not cause damages or injury to persons.

RELIEF SAFETY VALVE (1/2 INCH)

SR. NO.	PART NAME	QTY.	MAT.
01	BODY	01	G.M.
02	STEAM	01	G.M.
03	CAP	01	G.M.
04	DIAPHRAGM	01	G.M.
05	TEFLON WASHER	01	PTFE
06	SPRING	01	SPRING STEEL
07	TENSION ADD.	01	G.M.

